

# Networking the Sky

Michael Schnell and Sandro Scalise, German Aerospace Center (DLR), Institute of Communications and Navigation, D-82234 Wessling, Germany


## Abstract

In this paper, an overview of the NEWSKY project is given. This project is funded by the European Commission within the 6th framework program and will start in January 2007. The NEWSKY project is a feasibility study to clarify if it is possible to establish a heterogeneous network for aeronautical communications which is capable to integrate different communications systems as well as different applications into a single global aeronautical network. The envisaged applications comprise not only air traffic control and management but also airline and passenger communications.

## 1 Introduction

Today, flying is still one of the safest ways to travel or transport goods worldwide. The Air Traffic Control (ATC) and Air Traffic Management (ATM) systems achieving this level of safety are well established and work very reliable. However, the expected ongoing growth in air traffic will lead to bottlenecks in air transportation in the near future if existing ATC/ATM systems and paradigms are not changed. This is especially true for aeronautical communications, a key enabler for an efficient and safe air transportation system. The capacity of the existing ATC/ATM communications infrastructure is already strongly saturated and according to Eurocontrol it is expected that the existing systems in Europe will be overloaded within the next 10-15 years even after realization of already planned and partly introduced amendments as indicated in Figure 1.

Aeronautical communications can be subdivided into two main areas, the safety critical ATC/ATM communication which also covers airline communications (AOC, AAC) and the commercial aeronautical passenger communications (APC). Currently, safety critical communication is mainly based on voice communication using DSB-AM (Double-Sideband Amplitude Modulation) which is an over 50 year old analogue communications technique which uses the available spectrum very inefficiently. Besides analogue voice communications data link applications based on VDL (VHF Digital Link) Mode 2 are currently introduced according to Eurocontrol's Link 2000+ [1] and Cascade [2] programs. However, it is expected that the introduction of VDL Mode 2 data link communications will only extend the deadline for capacity saturation up to 2020, see Figure 1. Moreover, a global coverage with acceptable communications performance is still missing today, especially, for remote and oceanic areas. For commercial APC, there already exist some proprietary solutions to connect passengers during the flight to the communication

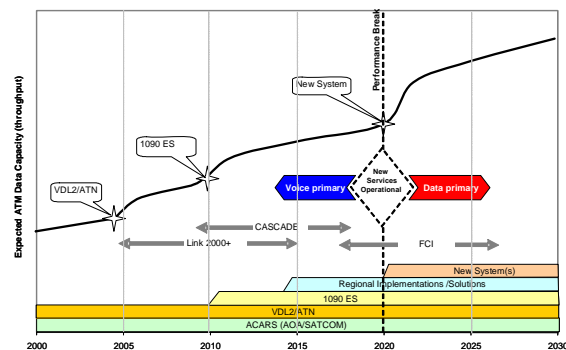

**Figure 1:** Expected development of the data communication needs for ATC/ATM and roadmap for the introduction of new ATC/ATM communications systems (Source: Eurocontrol).

networks of the world. These approaches are based on satellite communications like “Connexion by Boeing” [3] or Inmarsat’s “Swift Broadband” [4].

The Federal Aviation Administration (FAA) and Eurocontrol have already identified the upcoming bottlenecks in ATC/ATM communications and have started to develop the “Future Communications Infrastructure” (FCI) under the framework of the International Civil Aviation Organization (ICAO). Besides the development of new concepts and paradigms, one important part of the FCI is the development of new aeronautical communications systems which are capable to cope with the demands and requirements of future ATC/ATM concepts. In a first step, requirements for future aeronautical communications systems have been developed [5] and a screening of potential technologies has been carried out [6]. Considering first outcomes of the FCI, the future ATC/ATM communications system will consist of several link technologies to be able to fulfill the manifold requirements and demands. Both ground and satellite based communications systems will be needed. Moreover, another system for airport communications is desirable which is able to assist the implementation of Advanced Surface Movement Guidance and Con-

trol Systems (A-SMGCS) which are desperately needed for improving the throughput of airports, another main bottleneck in air transportation. In addition, a paradigm change is in preparation where data will replace voice as primary means for ATC/ATM communications as shown in Figure 1.


In summary, there will be several different systems for aeronautical communications in the future for both safety critical ATC/ATM communications and commercial APC. Up to now, these systems are supposed to work in parallel each requiring its own infrastructure onboard the aircraft as well as on ground. What is currently missing is an integrating approach. Therefore, we have proposed our concept of Networking the Sky which aims at integrating the different systems for aeronautical communication – ground based, satellite based, as well as airport systems, and systems based on ad-hoc networks between aircraft – into a global heterogeneous communications network, thus, realizing an ATC/ATM communications system which is completely transparent to the users. In addition, this global, heterogeneous network is intended to transport both ATC/ATM information and APC. This approach enables to reuse existing infrastructure which has been setup for a certain application by other applications, e.g. use satellite communications for ATC/ATM which is already available for APC. Of course, ATC/ATM communications has to be prioritized over APC to ensure that safety critical communication always wins over APC and arrives in time at the right place with the required Quality of Service (QoS).

The remainder of this paper is organized as follows. In Section 2, an overview of the NEWSKY project is given which is funded by the European Commission (EC) and will start beginning of next year. Advantages and challenges of the NEWSKY approach are discussed in Section 3 and 4, respectively. Section 5 concludes the paper with a short summary and an outlook.

## 2 The NEWSKY Project

To realize the vision of networking the sky, the feasibility study NEWSKY (“NETWorking the SKY”) has been initiated within the 6th EC framework program. The proposal has been positively evaluated and we are currently preparing the contract together with the EC. The expected starting date for NEWSKY is January 2007. The duration of the project is 30 month and, therefore, the project will last until the end of June 2009. Approximately 250 person month of work will be invested during the project duration.

The NEWSKY consortium comprises eight partners from four different European countries. Besides DLR as project coordinator and one of the main contributors there are TriaGnoSys GmbH and the Deutsche

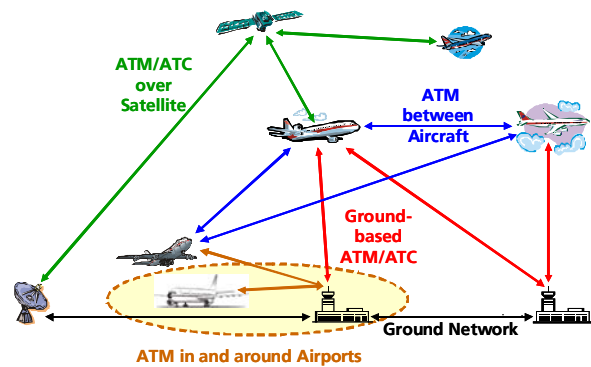

**Figure 2:** Integration of different aeronautical communication systems into a global airborne network to realize the vision of “Networking the Sky”.

Flugsicherung GmbH (DFS) involved as German partners. From Austria the University of Salzburg and Frequentis GmbH contribute to NEWSKY. Alcatel Alenia Space and France Developpement Conseil are the French partners within the consortium and QinetiQ Ltd from Great Britain completes the consortium. With this European mix of partners all required competencies are available to perform the study successfully.

The main goal of the NEWSKY project is to show that the integration of different communications systems and different applications (ATC, ATM, AOC, AAC, APC) into a global, heterogeneous network for aeronautical communications is feasible and how this integration can be achieved. As illustrated in Figure 2, ground-based as well as satellite-based communications systems, airport communications systems for A-SMGCS applications, and communications systems for direct aircraft-aircraft communications based on ad-hoc networking are considered. Integrating different communications systems and application into a global, heterogeneous network creates several benefits on the one hand but also has some challenges to be solved on the other hand. The most important challenges are to ensure the different levels of QoS for the different applications and to ensure network security. Benefits and challenges are detailed in the Section 3 and 4, respectively.

To achieve the NEWSKY goal, the following five main objectives have been defined which also reflect the working program of the project.

### 2.1 Develop a Framework for the ATM Network Transformation

A unitary framework is developed for the transformation of the currently disparate ATM communication infrastructure into a seamless global network. This goal is achieved by producing a network transformation concept, a mission definition, a business case study, a deployment plan, and a long-term concept evolution study.

## **2.2 Identify the Relevant Application Scenarios and Service Requirements**

Application scenarios as well as high level NEWSKY service requirements which are used for both the NEWSKY network design and the NEWSKY validation are defined. To achieve this goal, inputs from all relevant bodies are considered, e.g. ICAO and Eurocontrol. Moreover, feedback from airspace users is collected by organizing workshops with airlines, airports, Air Navigation Service Providers (ANSPs), aeronautical communication service providers, and Eurocontrol.

## **2.3 Develop the Framework for the NEWSKY Network Concept and Architecture**

An architectural analysis and design is performed leading to the definition of the NEWSKY network concept. This goal is achieved by splitting this task into the design and definition of the network architecture on the one side and the system architecture on the other side. Whereas the network architecture is related to the different ISO/OSI layers, the system architecture addresses the different system components comprising the different communication segments, i.e., the air-ground, ground-ground, air-air, and space segment.

## **2.4 Design and Evaluate the NEWSKY Integrated Airborne Network**

Based on the developed framework for the NEWSKY network concept a detailed NEWSKY network design is performed which mainly comprises the ISO/OSI layers 2, 3, and 4. To achieve this goal four key network aspects, namely resource management, routing, handover, and security, are considered in detail. Moreover, the interrelations between these four key network aspects are taken into account to ensure the benefits of the network centric NEWSKY approach.

## **2.5 Validate the NEWSKY Integrated Airborne Network Design**

The benefits of the NEWSKY integrated airborne network design are assessed. Especially, coverage and reliability as well as capacity, throughput, and delay of the NEWSKY network are determined and compared to the current situation in aeronautical commu-

nication. To perform this assessment both simulations and laboratory trials are carried out.

### **2.5.1 Validation Using Simulations**

The simulations are performed in a two step approach using a network topology simulator and an end-to-end ATM network simulator. Whereas the first simulator takes into account realistic air-traffic scenarios to determine the dynamic of the network topology and provide a statistical characterization of the communication links, the second simulator is a pure network simulator for ISO/OSI layers 2, 3, and 4 using the results from the first simulator to model the lower layers. The simulations are used to validate the performance of the designed networking algorithms, to optimize and fine tune the relevant parameters, and to refine the NEWSKY network architecture.

### **2.5.2 Validation in Laboratory Trials**

The laboratory trials are performed to show the feasibility of the NEWSKY concept in a real environment. With the developed laboratory test-bed a limited subset of some critical network functionalities, like seamless handover between different communication segments, for certain applications, like VoIP or real-time information streaming, is validated.

## **3 Benefits of the NEWSKY Approach**

The NEWSKY approach shows a high potential for benefits in aeronautical communications which are summarized below:

- Compared to a single communications link an integrated network inherently achieves increased redundancy which in turn increases availability and reliability of the overall communications system.
- The coverage of the overall system is increased, since different communication systems with different application areas are combined.
- NEWSKY integrates several communication links which are specially adapted to different environments, e.g., Wireless Local Area Network (WLAN) based technology for airport communication and satellite-based communication for remote or oceanic areas. This enables globally optimized network performance.
- The integrated NEWSKY approach ensures interoperability between different communication links and, thus, provides a seamless ATM system which is fully transparent to the end users.
- The different communication links within NEWSKY cover the whole available Aeronauti-


cal Mobile (Route) Services (AM(R)S) and Aeronautical Mobile Satellite (Route) Services (AMS(R)S) spectrum. As global integrated network NEWSKY realizes the most flexible and efficient use of the available aeronautical spectrum allocations as shown in Figure 3.

- The NEWSKY concept is especially designed for global, integrated aeronautical communication and, thus, is tailored to aeronautical requirements and needs.
- A single integrated airborne avionics system covers the whole variety of communication links and can be used for different application classes (ATC/ATM, AOC, AAC, APC). Moreover, surveillance data links for ADS-B can also be included. This is a business case enabler making the introduction of new communication technologies more attractive to airlines.
- The NEWSKY network architecture is a modular concept which is easily reconfigurable and extendable. New communication link technologies can be easily included and phased-out technologies withdrawn.
- The modular NEWSKY network architecture enables easier introduction of future communication links. Note, deployment of new communication links within an existing architecture is a crucial problem nowadays.

As a result, these benefits of the NEWSKY approach realize future aeronautical communications with considerably increased capacity, coverage, and reliability. This improved communications capability ensures that aeronautical communications will be able to cope with the expected growth in future air traffic on an even increased level of safety.

## 4 Challenges of the NEWSKY Approach

Besides its benefits the NEWSKY approach also shows several challenges which have to be solved before an implementation of the NEWSKY concept is possible. First of all, an adaptation layer as common interface towards the different link technologies has to be designed and appropriate routing algorithms, resource management strategies, and concepts for system handovers have to be developed. These handover concepts and routing algorithms have to ensure that the QoS can be maintained during a required handover from one communications link technology to another. This is a technological challenge, since different link technologies might offer different data transmission capacities. Similar challenges exist for the resource management strategies which have to ensure that network resources are used globally in an optimized way.

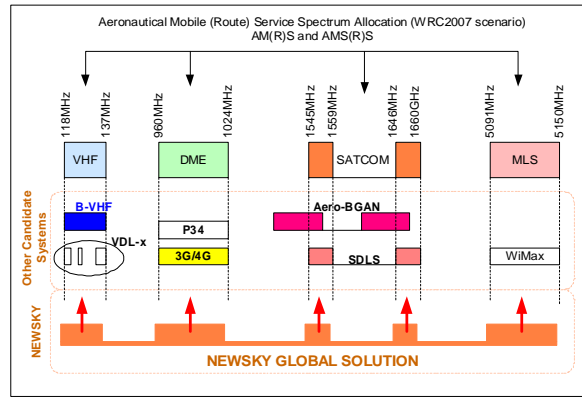

**Figure 3:** Flexible and efficient use of available aeronautical spectrum allocations.

Moreover, a basic concept for networking has to be developed and evaluated with respect to performance, coverage, reliability, and robustness.

Another challenge is the integration of different applications – ATC/ATM and APC – which requires to establish appropriate QoS classes and priority rules to ensure that safety critical communication is always served with the required priority and QoS. In addition, network security is an important issue, especially for ATC/ATM. The communication between pilots and controllers has to be secure, i.e. eavesdropping as well as creating or changing of information by a third party has to be securely avoided. This can be achieved by incorporating authentication, encryption, and integrity information about the transmitted data into the network concept.

## 5 Summary and Outlook

## 6 References

- [1] <http://www.eurocontrol.int/link2000>
- [2] <http://www.eurocontrol.int/cascade>
- [3] M. de La Chapelle, “Broadband Connectivity to Aircraft and Passengers – a Progress Report”, *23rd AIAA International Communications Satellite Systems Conference*, Rome, Italy, September 2005.
- [4] M. Richharia and E. Trachtman, “Broadband Global Area Network Air Interface Evolution”, *23rd AIAA International Communications Satellite Systems Conference*, Rome, Italy, September 2005.
- [5] COCR
- [6] FCS Screening